


EKF 611 CTC



COMPACT COMBI OVEN WITH TOUCH CONTROL

In just 50 cm wide includes all the features aimed at achieving optimum cooking uniformity. A compact combi oven, fast, intuitive and simple. Designed for restaurants that need to combine all the technology of a cutting-edge product with the limited spaces of kitchen environments. The oven already offers as standard equipment the core probe with support, Automatic cleaning and the USB port on the door. Maximum efficiency in minimum space.

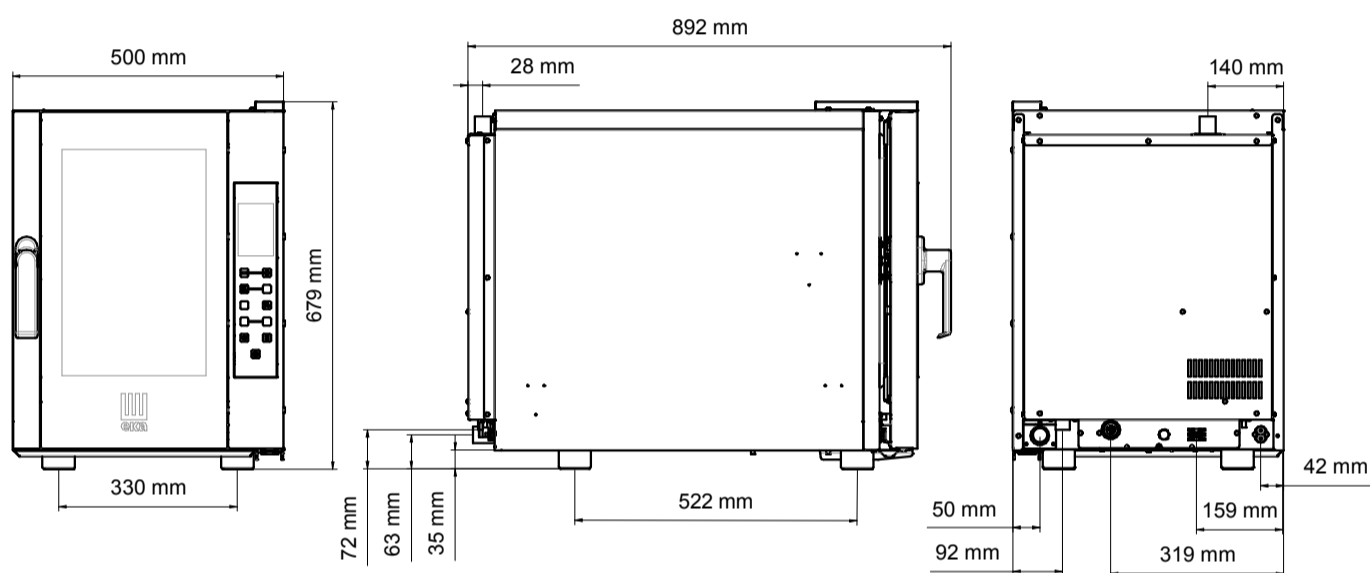

DIMENSIONAL FEATURES			
Oven dimensions (WxDxH mm)	500	892	679
Oven weight (kg)	65,4		
Distance between rack rails (mm)	68		

ELECTRICAL FEATURES	
Power supply (kW)	7,8
Frequency (Hz)	50/60
Voltage (Volt)	AC 380/400 3N
N° of motors	1 Bidirectional
Boiler	/
Protection against water	IPX5

EQUIPMENT			
Cardboard box dimensions with pallet (WxDxH mm)	562	952	847
Lateral supports	1dx + 1sx		
Cable	Triphase+neutral [5G 2,5] - L = 1600 mm		
USB port (on the door)			
Manual+automatic washing set up			
Removable drip box (on the door)			
Core probe with support EKSCS			
Automatic flushing (n° 4 programs) KWT/A			

OPTIONAL	
Chromed grid 1/1 GN	Cod. KG9G
AISI 304 vertical chicken cooking pan	Cod. KGP
AISI 304 tray 1/1 GN	Cod. KT9G
Air reducer	Cod. EKRPA/A
Spray kit with support	Cod. EKKD
Sparkling aid	Cod. KBRILD e Cod. KBRILMD
Cleaning Fluid	Cod. KDET

FUNCTIONAL FEATURES	
Power	Electricity
Capacity	N° 6 trays/grids 1/1 GN
Type of cooking	Ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 Stainless steel
Temperature	30 ÷ 260°C
Temperature control	Digital probe thermometer
Control panel	Touch Control - right side (on door)
N° of programs	240
Programmable cooking steps	9
Pre-heating temperature	180°C
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass

PLUS
USB port to upload and download recipes and HACCP data
240 storable recipes (40 set by Tecnoeka, 200 user-settable)
Start-up timer with 23 hours and 59 minutes delay
12 languages (italian, french, english, german, spanish, rumanian, polish, bulgarian, ukrainian, russian, turkish, greek)
Quick fastening of lateral supports
Readily serviceable door internal glass
AISI 304 stainless steel wide cooking chamber
Embedded gasket
"All glass" door with "satin-finish" AISI 304 stainless steel side profiles
Screen-printed glass control panel
Automatic flushing integrated
Cabinet water protection rating: IPX5
Direct chimney for cooking fumes/steam
Chamber drain for liquids
Double connection water entry (normal and softened)
Forced cooling system of inner parts
Quick cooling of cooking chamber
Adjustable door hinges
CB certification